


metalúrgica Vázquez

Junior 600

EQUIPMENT FOR PRODUCTION
OF TAPAS FOR EMPANADAS
WITH OR WITHOUT SEPARATOR FILM

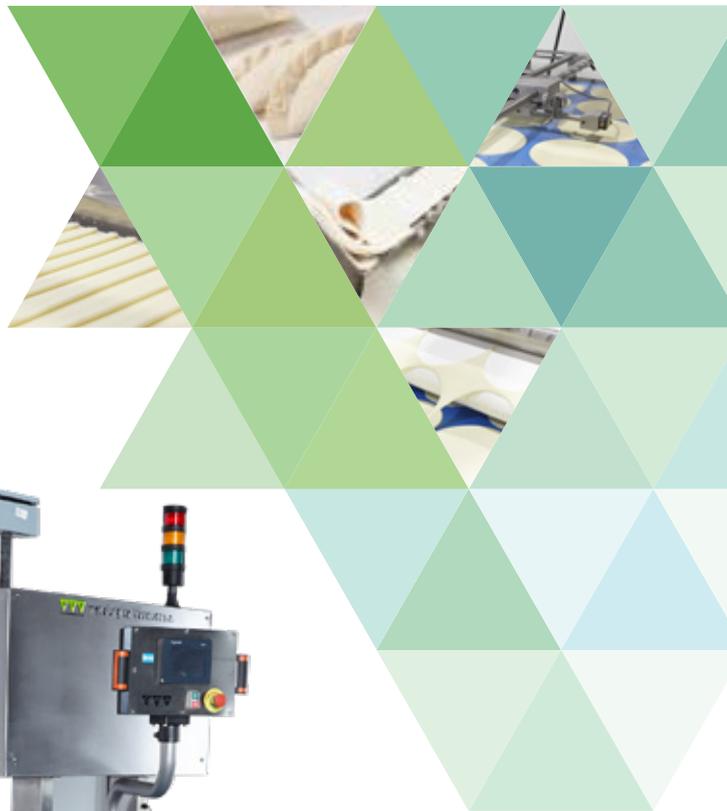


The images may vary depending on the model



DESCRIPTION

- A 624 mm wide laminating module for calibration, with $\varnothing 120$ mm rollers covered in hard chrome. Adjustable thickness from 0 to 3 mm. Adjustable speed by frequency inverter. Comprehensive stainless steel covers. Security devices.
- Cutting table, for interchangeable rotary cutting moulds. Mold supports with selective regulation of cutting pressure. Polycarbonate safety cover. Reinforced sanitary endless band. Stainless steel frame. Built with its own variable speed drive. Length 2000 mm, width 670mm.
- Rotary cutting mold of choice for the Junior 600 team, for cutting empanada discs.



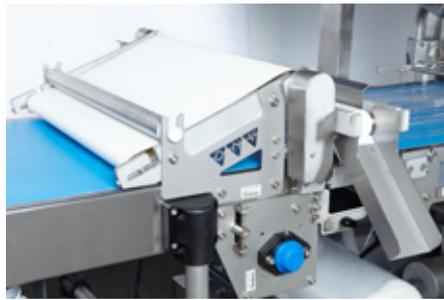

Junior 600

EQUIPMENT FOR PRODUCTION OF
TAPAS FOR EMPANADAS
WITH OR WITHOUT SEPARATOR FILM

- The mold will have cutting cups with ovalization compensation, built in stainless steel on a carbon steel base pipe with epoxy coating. Includes axle, bearings and plastic tips.
- Built-in support for replacement molds. Capacity for four (4) moulds.
- Trim removal tapes. Speed synchronized with the cutting table. Transversal outlet belt. Both sanitary, with linear guides and endless welding.
- Vacuum table for separator placement. Sanitary perforated band, speed Master drive for the line, polyethylene longitudinal cutting device, recordable for different mold layouts, high precision optical lid reader. Cantilever shaft reel holder for easy replacement and control of film tension, polyethylene crosscut blade for cold cutting at frequencies above 150 cuts/minute. High-speed cap launch ramp with its own drive and air cushion Only for Model with Separator.
- General command panel with dialog terminal, gear controls and speed master, process beacon and production achieved. Stainless steel cabinet. Protection elements according to international standards.
- Output table with intermittent movement at adjustable speed.

CHARACTERÍSTICS

Gross Capacity: 1600 Kg/h.

Nominal working width: 600 mm.

Production for Ø120 mm: 3600 dozens/h.

Continuous rolling with electronic dough tension control.

General regulations of line speed with automatic adjustment of individual speeds per module.

The equipment can cut with or without the separator. In case is without, the Junior won't have Vacuum table.

All cutting formats: round, square, triangles, ovals, etc. Just changing the cutting mold in minutes.

Square separator equals an integer use of polyethylene, without waste of it on the production line. Recovery of cuttings of total mass of polyethylene.

Automatic stacking to the desired quantity without the intervention of any personnel.

The Flour Mill is an additional equipment, it is not included in the Junior 600.

Metalúrgica Vázquez S.A.



Pasaje Cuba 729, Piñeyro,
Avellaneda, Buenos Aires.
ventas@monv.com.ar

0800-666-5256
54 (11) 4201-8996
Fax: 54 (11) 4222-7304

www.monv.com.ar